


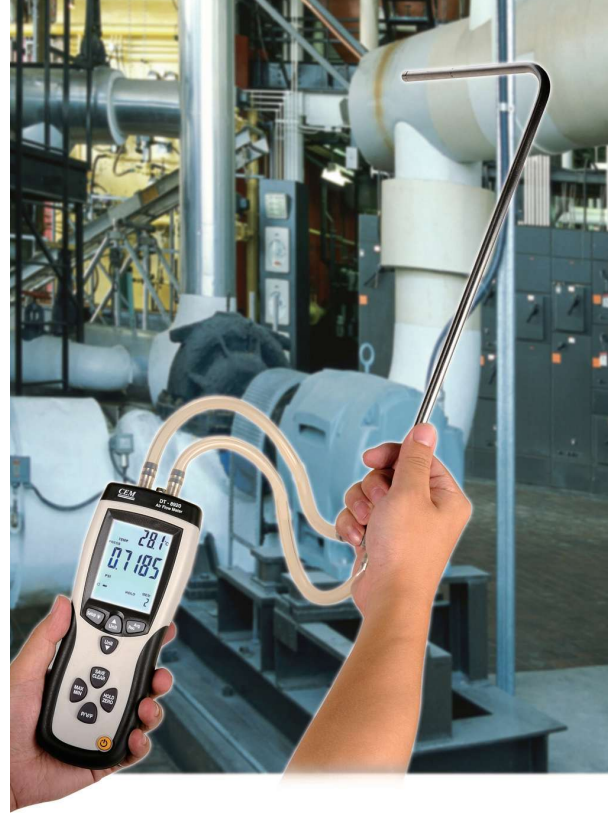

DT-8920

PRESSURE & FLOW METER

- | Large LCD display with backlight
- | Relative time clock on MAX MIN and AVG provides a time reference for measurement
- | Pressure, Velocity or Air Flow Measurement with Zero Adjust
- | Display Pressure, Air Velocity or Air Flow plus environment Temperature simultaneously
- | Easy to Calculate the area of a rectangular or circular duct
- | USB interface, USB to UART Bridge Controller
- | Low battery Indication, and Auto Power Off Mode (Sleep mode) increases

DT-8920

Pressure & Flow Meter



General Specification

Operating Conditions	0 to 50°C
Storage Conditions	-10 to 60°C
Power Supply	1X 9V Battery
Low Battery Indicator	Yes
Dimensions	203mmx75mmx50mm
Relative Humidity	Non condensing (<10°C) 90% RH (10°C to 30°C) 75% RH (30°C to 40°C) 45% RH (40°C to 50°C) (Without Condensation)

Manometer Specification

Accuracy	±0.3% FSO(25°C)		
Repeatability	±0.2% (Max. +/-0.5% FSO)		
Linearity/Hysteresis	±0.29% FSO		
Pressure Range	5000 Pa		
Maximum Pressure	10psi		
Response Time	0.5 Seconds typical		
Over range Indicator	Err.1		
Under range Indicator	Err.2		
	Units	Range	Resolution
	PSI	0.7252	0.0001
	Mbar	50.00	0.01
	inH2O	20.07	0.01
	mmH2O	509.8	0.1
	Pa	5000	1

1psi*27.68=inH2O
1psi*68.947=mbar
1psi*703.072=1*mmH2O
1psi*6894.6=Pa
FSO: Full Scale Output

Anemometer Specifications

Range of Air Velocity

Air Velocity	Range	Resolution	Accuracy
m/s(meter per second)	1.00-80.00	0.01	±2.5% of reading at 10.00 m/s accuracy is function of velocity and duct size
ft/min(feet per minute)	200-15733	1	
km/h(kilometers per hour)	3.6-288.0	0.1	
MPH(miles per hour)	2.24-178.66	0.01	
Knots(nautical miles per hour)	2.0-154.6	0.1	

Range of Air Flow

Air Flow	Range	Resolution
CFM	0-99.999ft³/min	0.0001 to 100
CMM	0-99.999m³/min	0.001 to 100

CFM(ft³/min) = Air Velocity (ft/min) x Area (ft²)

CMM(m³/min) = Air Velocity (m/s) x Area (m²) x 60

CFM: cubic feet per minute

CMM: cubic meters per minute

Range of Temperature

	Range	Resolution	Accuracy
°C	0 to 50.0°C	0.1	±1.0°C
°F	32.0 to 122.0°F	0.1	±2.0°F

Contact :

CEM INSTRUMENTS (INDIA) PVT. LTD.

32A, Ganesh Chandra Avenue, 4th Floor, Kolkata-700013

Tel: 033-22151376, 22159759

Email: info@cem-instruments.in / info@cem-india.com

Web: www.cem-instruments.in / www.cem-india.com

CEM INSTRUMENTS HEADQUARTER & FACTORY

19th Building, 5th Region, Baiwangxin Industry Park,
Songbai Road, Baimang, Xili, Nanshan, Shenzhen,
China, 518108

Tel: +86-755-27353188, Fax: +86-755-27653699

